



# Configuration proposal Anesthesia (AN3)


Side view right




Front view



Side view left



Back

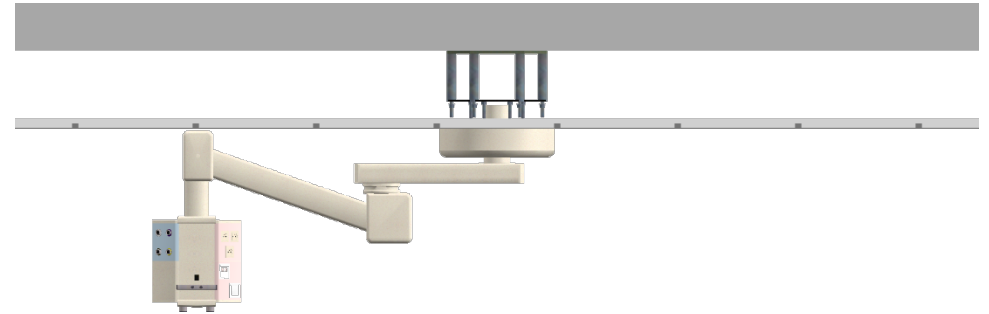

Configuration description:

Multimovement pendant 600/1000 with Service Head 400

1. Brake system: Pneumatic
2. Action space\*: >4,000 mm
3. Weights and Pay Loads  
 Remaining Net Pay Load: 68 kg  
 Max. pendant pay load: 90 kg  
 Vertical force as configured: 2278 N
4. Remaining Diameter: 46 %

Number of service components


O <sub>2</sub>	Air 4/5	N <sub>2</sub> O	Vac	CO <sub>2</sub>	N <sub>2</sub>	AGSS	Air 8/ Air- motor	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
1	1	1	1			1		6	6	1	2
DKD AFNOR (Norme francaise)								Legrand			

\* reference: centre of main bearing to centre of shelf



# Configuration proposal Anesthesia (AN3)

Side view right



Front view


- O2 1
- N2O 2
- AIR5 3
- VAC 4



- 1 White
- 2 White
- 3 White

- 1 2x Cat6 IDC
- 2 Preparation

Side view left



Back

- Red 1
- Red 2
- Preparation 1



AGSS