





# Configuration proposal Anesthesia (AN4)

Side view right





Front view



Side view left



Back

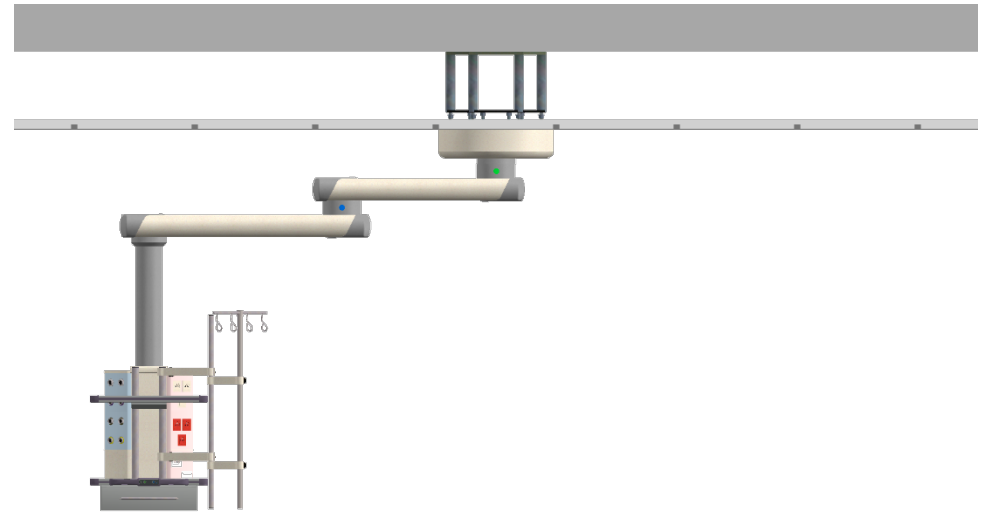

## Configuration description:

MediBoom®Air+ 800/1000 with Service Head 600  
 2 x Shelf 520 mm, 1 x Drawer, 1 x IV pole w. extension

1. Brake system: Electropneumatic
2. Action space\*: >4,400 mm
3. Weights and Pay Loads  
 Remaining Net Pay Load: 134 kg  
 Max. pendant pay load: 190 kg  
 Vertical force as configured: 3153 N
4. Remaining Diameter: 65 %

Number of service components											
O <sub>2</sub>	Air 4/5	N <sub>2</sub> O	Vac	CO <sub>2</sub>	N <sub>2</sub>	AGSS	Air 8/ Air- motor	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
2	2	1	2			1		10	10	2	2
DKD AFNOR (Norme francaise)								Legrand			

\* reference: centre of main bearing to centre of shelf



# Configuration proposal Anesthesia (AN4)

Side view right




Front view

- O2 1
- O2 2
- N2O 3
- N2O 4
- AIR5 1
- AIR5 2
- VAC 3
- VAC 4




- 1 White
- 2 White
- 3 White
- 1 Red
- 2 Red
- 3 Red
- 1 2x Cat6 IDC
- 2 2x Cat6 IDC

Side view left

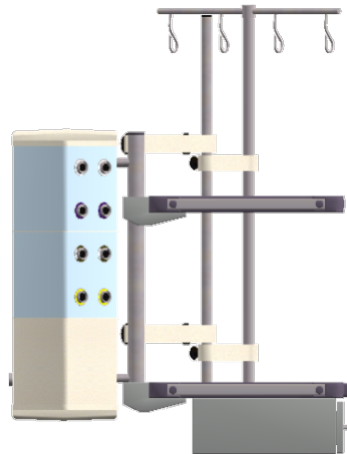

Back

- White 1
- White 2
- White 3
- Red 1
- Preparation 2
- Preparation 1
- Preparation 2

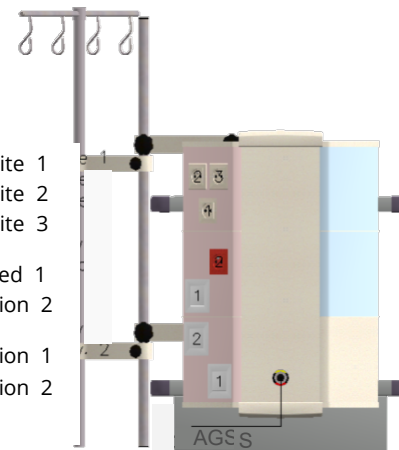

AGSS