

# Configuration proposal ICU (IC1)

Side view right





Front view




Side view left



Back

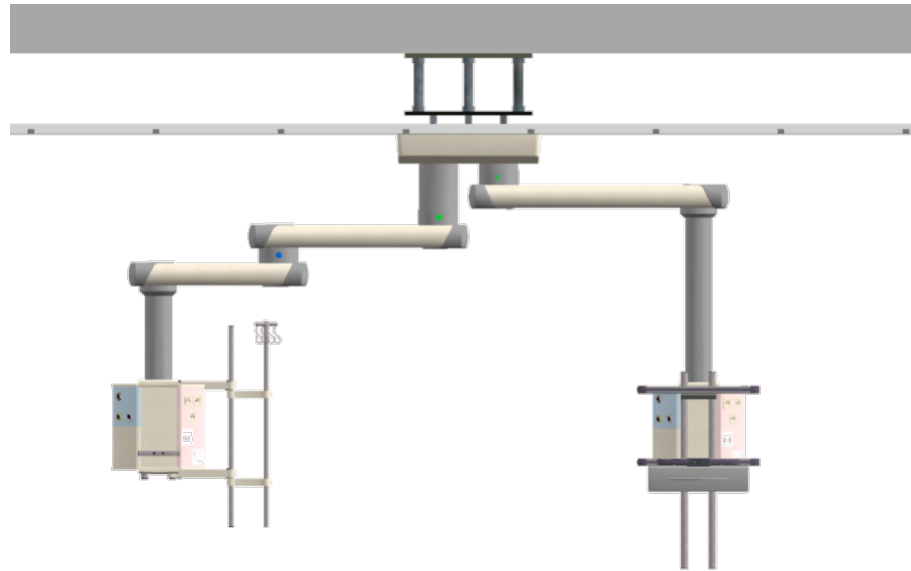


Side view right




Front view



Side view left



Back



Configuration infusion side:  
 MediBoom® Air 800/600  
 with Service Head 400  
 1 x Infusion pole with extension

Configuration ventilation side  
 MediBoom® Air 1000  
 with Service Head 400  
 2 x Shelf 520 mm, 1 x Drawer

1. Brake systems: Pneumatic
2. Action spaces\*: >3,600/>2,800 mm
3. Weights and Pay Loads  
 Remaining Net Pay Load: 191/273 kg  
 Max. pendant pay load: 220/320 kg  
 Vertical force as configured: 7535 N
4. Remaining Diameter: 82/82 %

\* reference: centre of main bearing to centre of shelf

Number of service components - Infusion side / Ventilation side											
O <sub>2</sub>	Air 4/5	N <sub>2</sub> O	Vac	CO <sub>2</sub>	N <sub>2</sub>	AGSS	Air 8/ Air- motor	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
1 / 1	1 / 1		1 / 1					6 / 6	6 / 6	1 / 1	2 / 2
DKD AFNOR (Norme francaise)								Legrand			

# Configuration proposal ICU (IC1)

## Infusion side

## Ventilation side

Side view right




Front view

O2 1  
VAC 2  
AIR5 3



1 White  
2 White  
3 White  
  
1 2x Cat6 IDC  
2 Preparation


Side view right

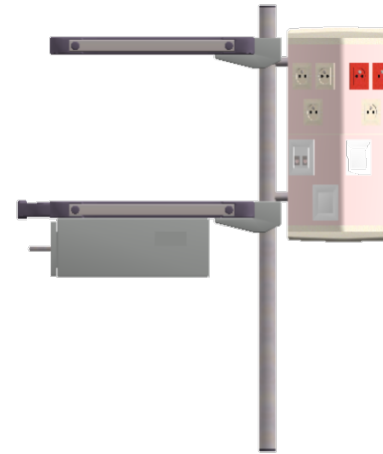

Front view




Side view left

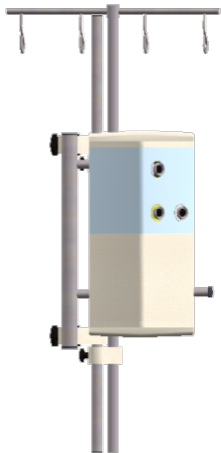

Back

Red 1  
Red 2  
White 3  
Preparation 1

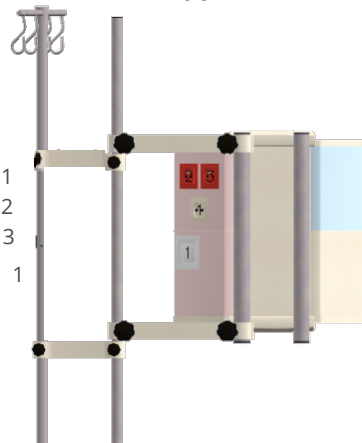

Side view left



Back

Red 1  
Red 2  
White 3  
Preparation 3

