



Configuration proposal ICU (IC3)


Side view right





Front view




Side view left




Back

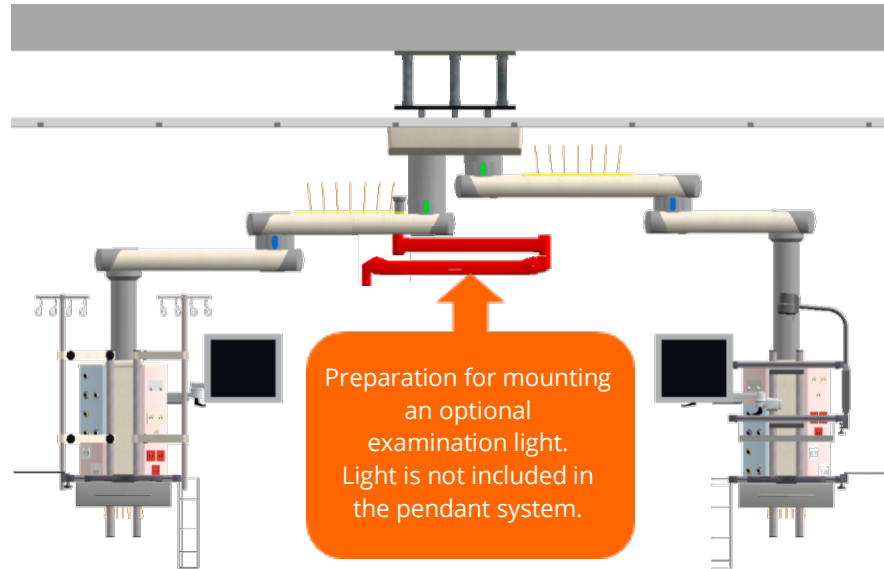

Side view right




Front view



Side view left



Back



Configuration infusion side:
 MediBoom® Air+ 800/800
 with Service Head 600
 1 x Shelf 520 mm, 1 x Drawer
 2 x Infusion pole with extension

Configuration ventilation side:
 MediBoom® Air+ 1000/600
 with Service Head 600
 3 x Shelf 520 mm, 1 x Drawer
 1 x Keyboard/writing tray

- 1 Brake systems: Pneumatic
- 2 Action spaces*: >4,000/>4,000 mm
- 3 Weights and Pay Loads
 Remaining Net Pay Load: 164/149 kg
 Max. pendant pay load: 220/220 kg
 Vertical force as configured: 6822 N
- 4 Remaining Diameter: 76/68 %

* reference: centre of main bearing to centre of shelf

Number of service components - Infusion side / Ventilation side											
O ₂	Air 4/5	N ₂ O	Vac	CO ₂	N ₂	AGSS	Air 8/ Air- motor	Electrical sockets	Earth bonding sockets	Double RJ45	Data prep.
2 / 2	2 / 2	0 / 1	2 / 2			0 / 1		10 / 12	6 / 6	2 / 2	2 / 2
DKD AFNOR (Norme française)								Legrand			

Configuration proposal ICU (IC3)


Infusion side

Ventilation side


Side view right




Front view

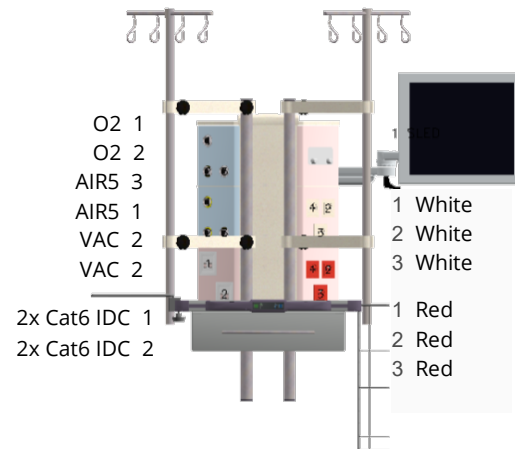


Side view right

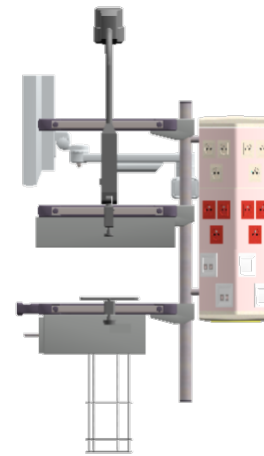


Front view

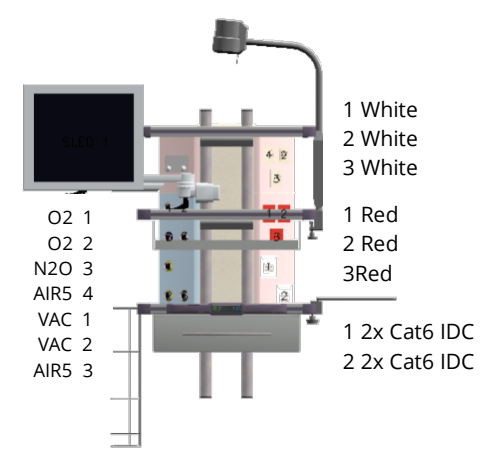


Side view left

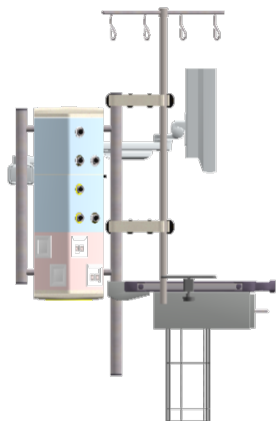

Back

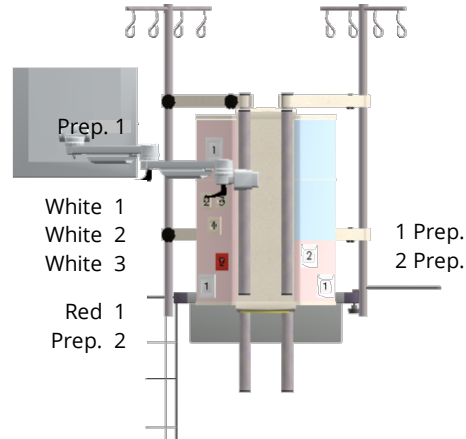

Side view left

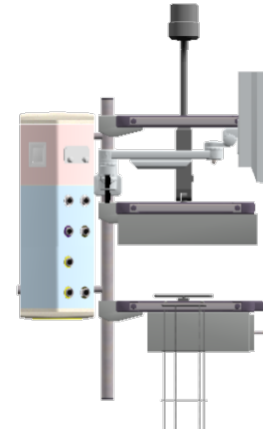

Back

